


The Morphic M76 Timepiece

(MPH7601 – MPH7606)

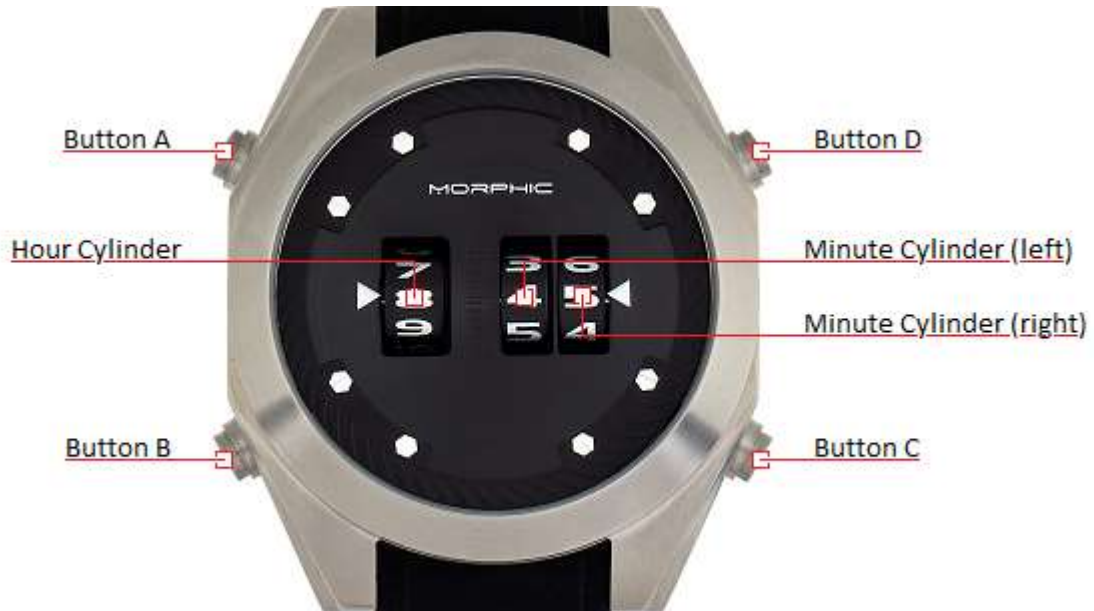

Cylinder Alignment

Cylinder alignment should be performed prior to initial time setting, and any time the cylinder numbers lose alignment. When adjusting the cylinders, pressing the corresponding button once will move the cylinder one increment, pressing and holding the button will move the cylinder at an accelerated rate. Align the cylinders to read **12:00** to ensure the numbers are level.

- 1) Press and hold button **A** until the cylinders begin rotating, then release the button.
- 2) Use button **B** to adjust the hour cylinder.
- 3) Use button **C** to adjust the left minute cylinder.
- 4) Use button **D** to adjust the right minute cylinder.
- 5) After alignment is complete, press button **A** or wait 15 seconds.

Setting the Current Time

When adjusting the cylinders, pressing the corresponding button once will move the cylinder one increment, pressing and holding the button will move the cylinder at an accelerated rate.

- 1) Press and hold button **B** until the hour cylinder rotates, then release the button.
- 2) Use button **B** to set the hour.
- 3) Use button **C** to set the left minute digit.
- 4) Use button **D** to set the right minute digit.
- 5) After setting to the current time, press button **A** or wait 15 seconds.

Demonstration Mode

The demonstration mode rotates all the cylinders three full rotations then returns to the current time. To activate demonstration mode, press button **C** or **D**.

Water Resistance Guidelines

5 ATM - may be submerged for short durations, in normal temperature fresh water only. Not suitable for bathing, swimming, watersports, or diving. **NOTE:** Manipulation of the buttons while the watch is in contact with water will negate the rated water resistance, as water penetration may occur.